

TECHNICAL SPECIFICATION


Floodlight - ATLAS 45



Technical data

- Rated voltage: 230V / 50Hz
- Lamp operation mode: Control gear
- Control gear: Mounted in the body
- Light source type (not included in the commercial kit): Metal-halide lamps (MHL)
- Lamp power: 70W, 150W
- Housing: Aluminium
- Housing colour: Black
- Reflector: Aluminium, asymmetric
- Diffuser: Tempered glass
- Installation: Surface mounting, suitable for illumination of outdoor and indoor areas
- Lampholder type: Rx7s
- Protection against dust and moisture: IP65
- Protection class: I
- Surface requirements: Class F
- Ambient temperature: -20°C ÷ +65°C

Variants and dimensions

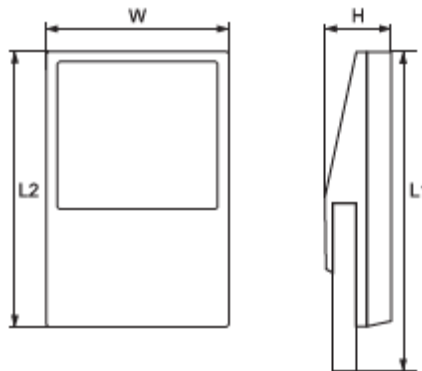


Watt	Lamp	Current (A)	Lamp holder	Colour	Size (mm)				Control gear	Catalogue number	Packing (pcs)
					L1	L2	W	H			
70W	MHL	1.00	Rx7s	black	435	350	232	85	magnetic	98AT45102	4
150W	MHL	1.80	Rx7s	black	435	350	232	85	magnetic	98AT45104	4
70W		-	Rx7s	black	435	350	232	85	empty fixture	98ATLAS45/BL1	4
150W		-	Rx7s	black	435	350	232	85	empty fixture	98ATLAS45/BL2	4


Luminous distribution curves




ATLAS 45 / 70W

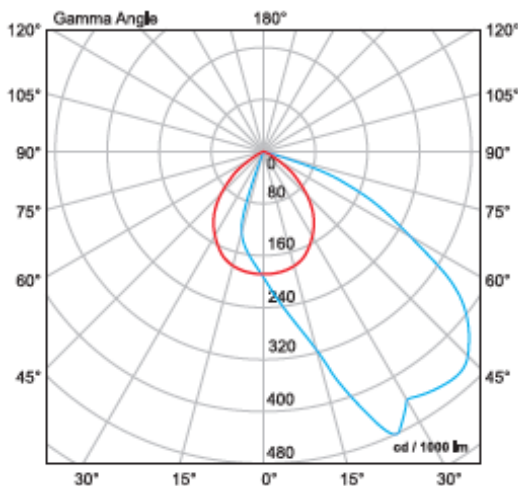

ATLAS 45 / 150W

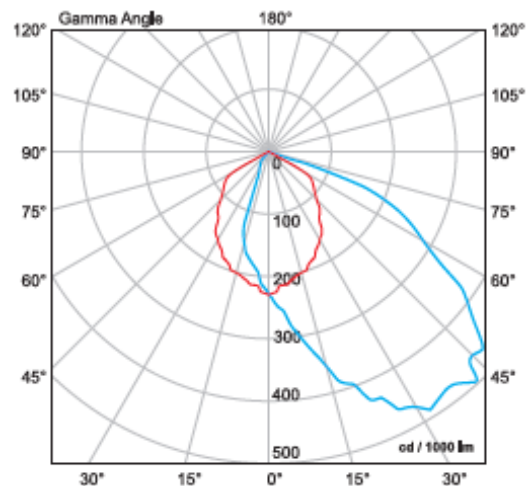

Energy efficiency

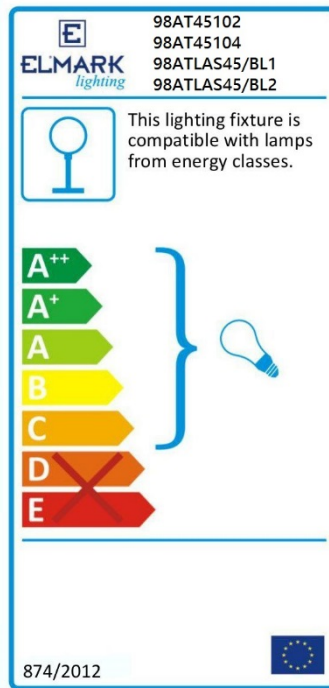

Barcodes

Barcode	Catalogue number
3800131164131	98AT45102
3800131164155	98AT45104
3800131164032	98ATLAS45/BL1
3800131164056	98ATLAS45/BL2

Standards

EN 55015

EN 61000-4-2; EN 61000-4-4; EN 61000-4-5; EN 61000-4-8; EN 61000-4-11

EN 61000-3-2; EN 61000-3-3

EN 61547

EN 60598-1; EN 60598-2-5

