

TECHNICAL SPECIFICATION

Downlight fixtures for CFL - GL202E



Technical data

- Nominal voltage: 230V / 50-60Hz
- Lamp power: max.2X20W
- Lampholder designation: E27
- Type of light source (not included commercial kit): 2pcs Compact fluorescent lamps with socket E27, max.20W
- Body material: Sheet steel with aluminium ring
- Diffuser: Transparent glass
- Reflector: Aluminium mirror
- Type of Installation : Recessed mounting for indoor use
- Body color: white, satin nickel
- Dust and humidity protection level: IP20
- Protection against electric shock: I
- Protection against ignition and fire: Class F


Areas of application

- Modern Residential Buildings
- Commercial buildings
- Offices
- Hotels
- Recreation facilities

Product benefits


- Lightweight body
- Simple appearance
- Easy installation

Variants and dimensions

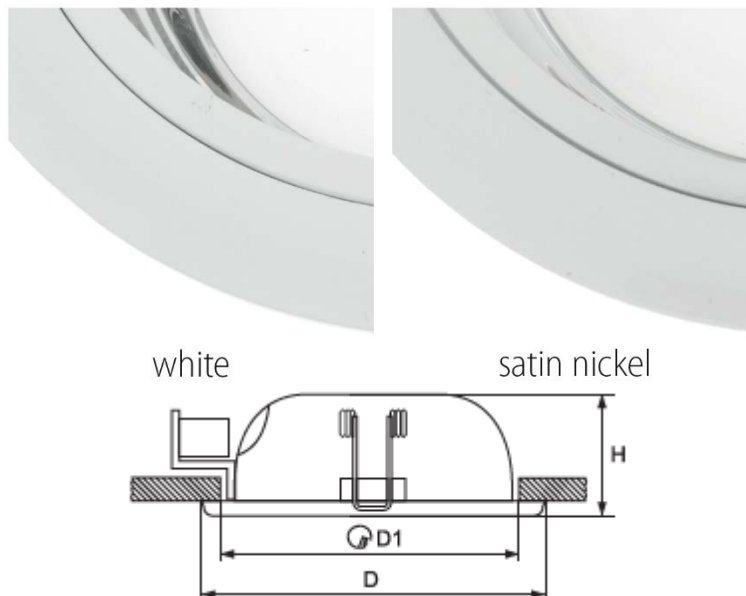

| Model | Size (mm) | | | Colour body | Catalogue number | Packing (pcs) |
|---------|-----------|--------|------------|--------------|------------------|---------------|
| | Diameter | Height | Diameter 1 | | | |
| GL 202E | 226 | 110 | 210 | white | 9299202E/W | 12 |
| GL 202E | 226 | 110 | 210 | satin nickel | 9299202E/SN | 12 |

Energy efficiency

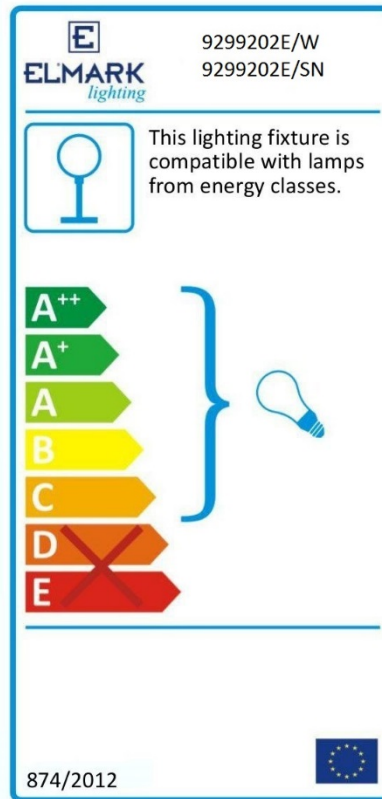

Barcodes

| Barcode | Catalogue number |
|---------------|------------------|
| 3800131162496 | 9299202E/W |
| 3800131162502 | 9299202E/SN |

Standards

EN 60598-1

EN 60598-2-2

