

TECHNICAL SPECIFICATION

Downlight fixtures for CFL - GL206E



Technical data

- Nominal voltage: 230V / 50-60Hz
- Lamp power: max.2X20W
- Lampholder designation: E27
- Type of light source (not included commercial kit): 2pcs Compact fluorescent lamps with socket E27, max.20W
- Body material: Sheet steel with aluminium ring
- Diffuser: Glass with matt round
- Reflector: Aluminium mirror
- Type of Installation : Recessed mounting for indoor use
- Body color: satin nickel/chrome, graphite/chrome
- Dust and humidity protection level: IP20
- Protection against electric shock: I
- Protection against ignition and fire: Class F

Areas of application

- Modern Residential Buildings
- Commercial buildings
- Offices
- Hotels
- Recreation facilities

Product benefits


- Lightweight body
- Simple appearance
- Easy installation

Variants and dimensions




satin nickel / chrome

graphite / chrome

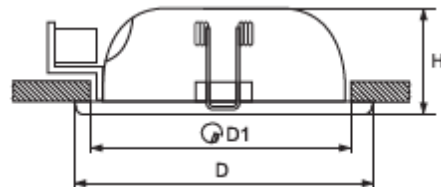

Model	Size (mm)			Colour body	Catalogue number	Packing (pcs)
	Diameter	Height	Diameter 1			
GL 206E	225	110	210	satin nickel / chrome	9299206E/SH	12
GL 206E	225	110	210	graphite / chrome	9299206E/GH	12

Energy efficiency

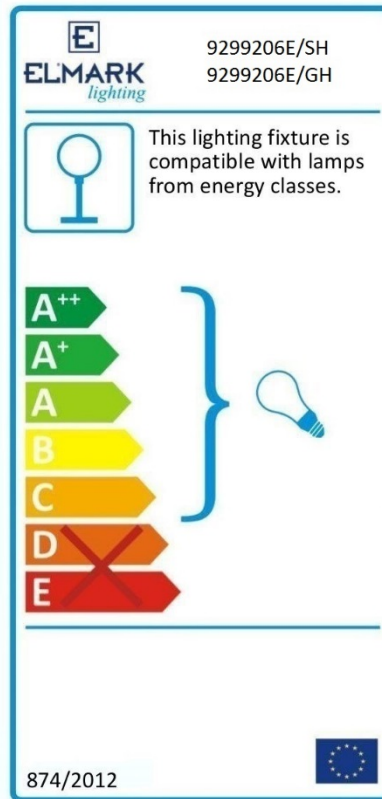

Barcodes

Barcode	Catalogue number
3800131162656	9299206E/SH
3800131162663	9299206E/GH

Standards

EN 60598-1

EN 60598-2-2

