

TECHNICAL SPECIFICATION

Downlight fixtures for CFL - GL205



Technical data

- Nominal voltage: 230V / 50Hz
- Lamp power: 2X10W; 2X13W; 2X18W; 2X26W
- Lampholder designation: G24q
- Type of light source (not included commercial kit): 2pcs Compact fluorescent lamps PLC-2P (TC-D) or PLC-4P (TC-DEL)
- Operating mode:
 - Electronic control gear for PLC-4P type lamp (not included commercial kit)
 - Magnetic control gear for PLC-2P type lamp (not included commercial kit)
- Body material: Sheet steel with aluminium ring
- Diffuser: Glass with matt round
- Reflector: Aluminium mirror
- Type of Installation: Recessed mounting for indoor use
- Body color: white, satin nickel
- Dust and humidity protection level: IP20
- Protection against electric shock: I
- Protection against ignition and fire: Class F

Areas of application

- Modern Residential Buildings
- Commercial buildings
- Offices
- Hotels
- Recreation facilities

Product benefits


- Lightweight body
- Simple appearance
- Easy installation

Variants and dimensions




white

satin nickel

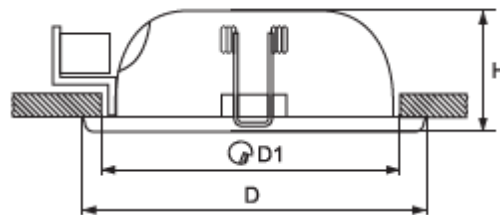

| Model | Size (mm) | | | Colour body | Catalogue number | Packing (pcs) |
|--------|-----------|--------|------------|--------------|------------------|---------------|
| | Diameter | Height | Diameter 1 | | | |
| GL 205 | 225 | 110 | 210 | white | 9299205P/W | 12 |
| GL 205 | 225 | 110 | 210 | satin nickel | 9299205P/SN | 12 |

Energy efficiency

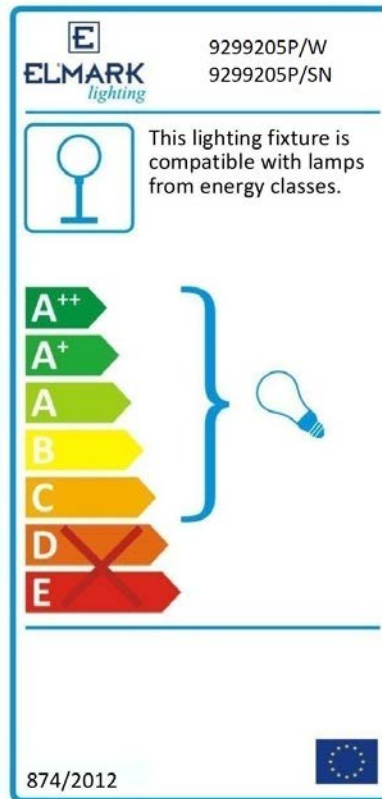

Barcodes

| Barcode | Catalogue number |
|---------------|------------------|
| 3800131162632 | 9299205P/W |
| 3800131162649 | 9299205P/SN |

Standards

EN 60598-1

EN 60598-2-2

