

## TECHNICAL SPECIFICATION

### LED Lamp - LED CANDLE C35 FILAMENT



#### Technical data

- Nominal voltage: 230V/50-60Hz
- Power: 2W; 4W
- Colour temperature: 2700K
- Colour body: mat / clear
- LED type: COB bracket
- Light source: Epistar Taiwan
- Base: E14
- Beam Angle: 360°
- Colour rendering index: Ra≥80
- Average Lifetime: 30 000h
- Switch on/off > 20000

#### Areas of application

- General illumination
- Domestic applications
- Chandeliers
- Outdoor applications only in suitable luminaires

## Product benefits



- Lower maintenance cost thanks to longer lifetime
- Reduced operational cost thanks to lower energy consumption.
- Mercury free.
- Maximum resistance to switching loads.
- Correct operation even at low temperature.
- Instant-on light.

## Variants and dimensions



Watt	Colour	LED chip lumens (lm) / LED(pcs)	LED lamp lumens (lm)	Colour temp. (K)	Colour body	Size (mm)		Catalogue number	Packing (pcs)
						Length	Diameter		
2W	warm white	120 / 2	200	2700	mat	100	35	99LED706	100
2W	warm white	120 / 2	200	2700	clear	100	35	99LED713	100
4W	warm white	120 / 4	400	2700	mat	100	35	99LED662	100
4W	warm white	120 / 4	400	2700	clear	100	35	99LED714	100

## Energy efficiency

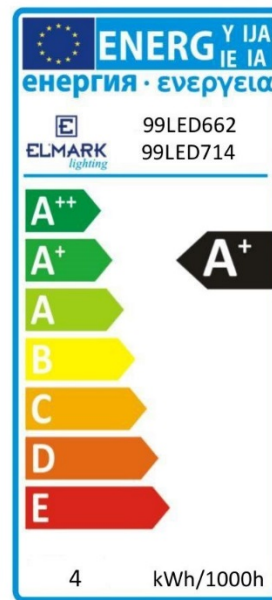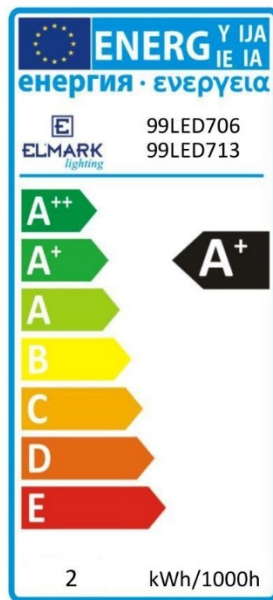

## Barcodes

Barcode	Catalogue number
3800131188717	99LED706
3800131188786	99LED713
3800131188793	99LED714
3800131187246	99LED662

## Standards

EN 55015

EN 61000-3-2; EN 61000-3-3; EN 61000-4-2; EN 61000-4-4; EN 61000-4-5; EN 61000-4-8; EN 61000-4-11

EN 61547

EN 62560

